


ALEXO® PIAZZINO TEAKWOOD

Product description 2015
INTERNATIONAL



Glatz
Shade in Swiss Quality

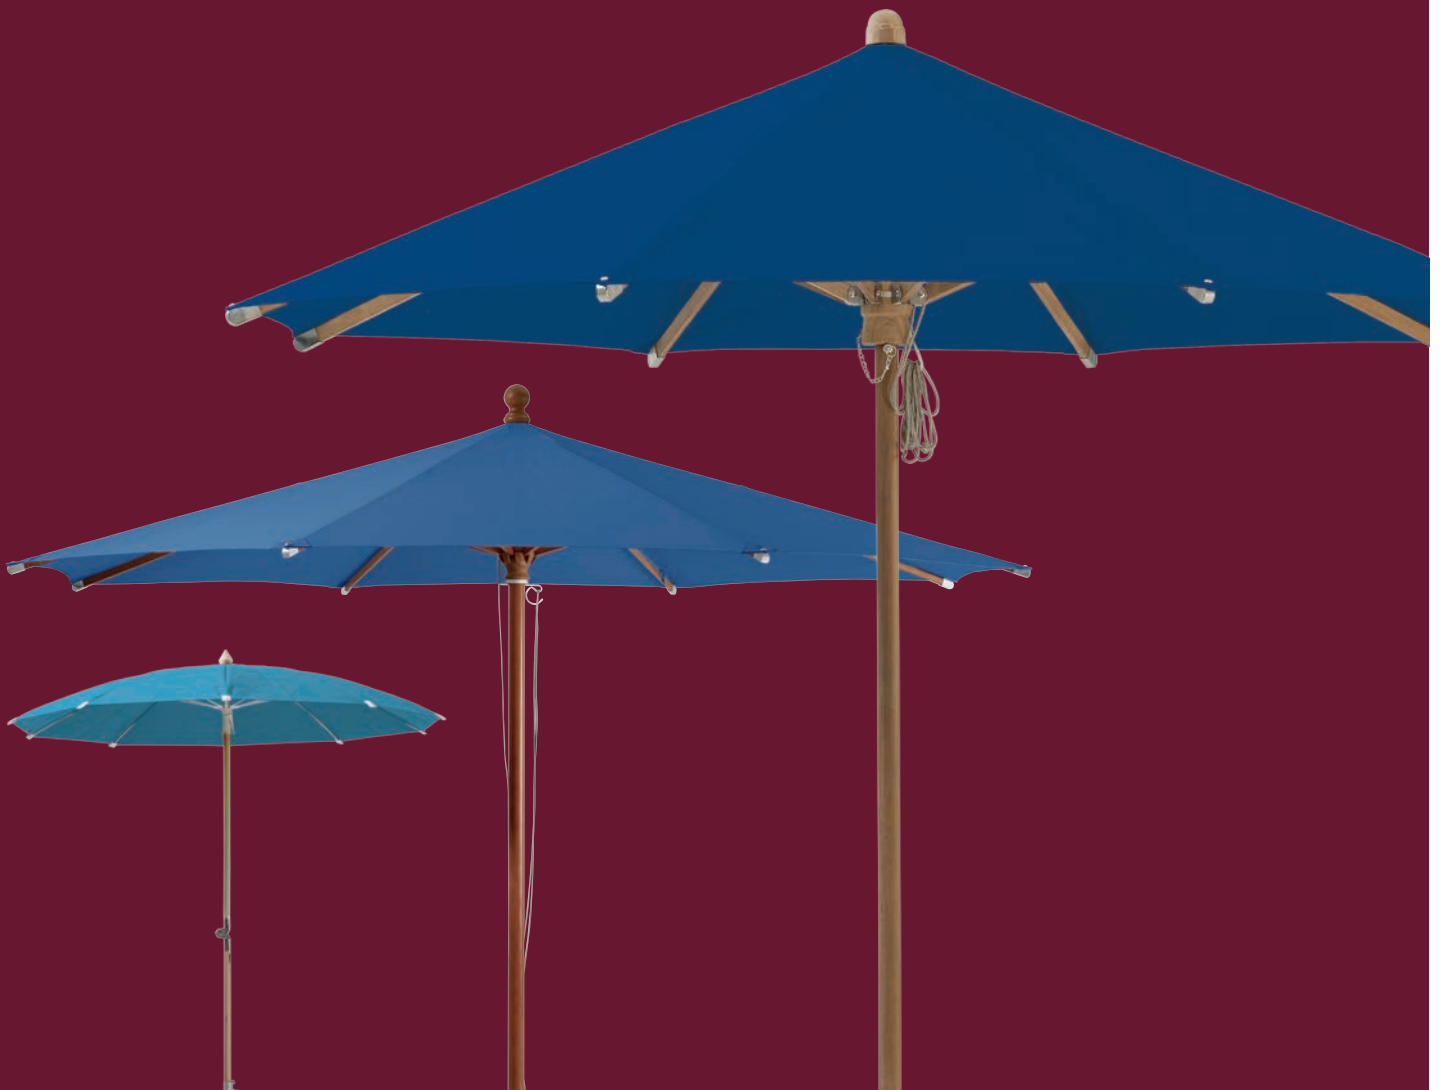

Frame:	10 rods made of varnished ash, pole diameter 30 mm, ALEXO® ribbed gear joint made of nickel-plated brass; rails of fibreglass
Frame material:	ash
Frame shape:	round
Shade cover:	available in material class 5 (100 % polyacrylic approx. 300 g/m ²) or material class 4 (100 % polyester approx. 250 g/m ²)
Flounce:	available with or without flounce. The model without flounce is equipped with leather reinforcements
Note:	The wood is supplied in a natural and therefore untreated state. The wood may secrete colourings and its own natural oils which may leave residues behind on a light coloured cover. This cannot be avoided and is therefore not admissible as a complaint. Wood is a natural product and should not be left in the rain for too long!

easy

Shade cover:	material class 2 (100 % polyester approx. 220 g/m ²)
Flounce:	not available
Fixations:	

ALEXO®, Int. Patents reg.




Nominal size ALEXO®

Size without flounce	Number of rods	Material class 4	Material class 5	Order no. Frame ash
		Colours 400 – 499	Colours 500 – 699	
cm				
∅ 200	10 parts			180 00 200 751
∅ 220	10 parts			180 00 220 751

Size with flounce	Number of rods	Material class 4	Material class 5	Order no. Frame ash
		Colours 400 – 499	Colours 500 – 699	
cm				
∅ 200	10 parts			180 00 200 750
∅ 220	10 parts			180 00 220 750

Nominal size ALEXO® easy

Size without flounce	Number of rods	Material class 2	Order no. Frame ash
		Colour 150	
cm			
∅ 220	10 parts		180 00 220 751

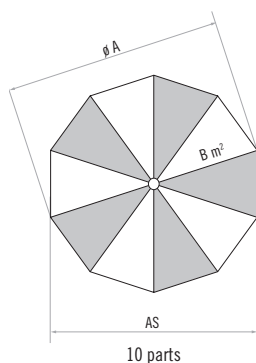

PIAZZINO



Frame:	8 parts made of maple, continuous Pole \varnothing 48 mm, with simple pulley system for easy-opening.
Frame material:	maple wood
Frame shape:	round or square
Shade cover:	reinforced with leather strips (white), available in material class 5 (100 % polyacrylic approx. 300 g/m ²) or material class 4 (100 % polyester approx. 250 g/m ²)
Flounce:	not available
Protective cover	included in the standard equipment
Note:	The wood is supplied in a natural and therefore untreated state. The wood may secrete colourings and its own natural oils which may leave residues behind on a light coloured cover. This cannot be avoided and is therefore not admissible as a complaint. Wood is a natural product and should not be left in the rain for too long!

easy

Frame:	8 parts made of hardwood, continuous mast \varnothing 48 mm, with simple pulley system for easy-opening.
Frame material:	hardwood (reddish coloring)
Shade cover:	available in the material class 2, colour 150 (100 % polyester abt. 220 g/m ²)
Fixations:	





Nominal size PIAZZINO

Size without flounce	Number of rods	Material class 4	Material class 5	Order no. Frame maple wood
		Colours 400 – 499	Colours 500 – 699	
cm				
\varnothing 300	8 parts			173 00 300 751
\varnothing 350	8 parts			173 00 350 751
300 x 300	8 parts			173 00 301 751

Nominal size PIAZZINO easy

Size without flounce	Number of rods	Material class 2	Order no. Frame hardwood
		Colour 150	
cm			
\varnothing 300	8 parts		172 00 300 751
\varnothing 350	8 parts		172 00 350 751
300 x 300	8 parts		172 00 301 751

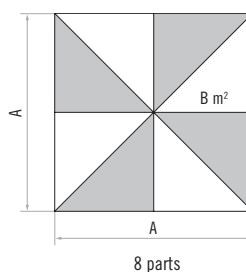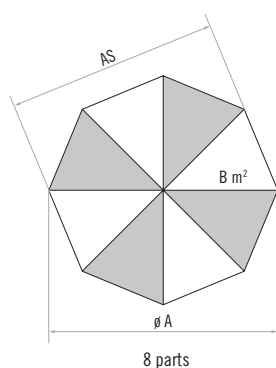

TEAKWOOD





Frame:	8 rods made of teak, pole with a continuous diameter of 48 mm, with a double pulley to facilitate easy opening.
Frame material:	teak
Frame shape:	round or square
Shade cover:	with leather reinforcements, available in material class 5 (100 % polyacrylic approx. 300 g/m ²) or material class 4 (100 % polyester approx. 250 g/m ²)
Flounce:	not available
Protective cover:	included in the standard equipment
Note:	The wood is supplied in a natural and therefore untreated state. The wood may secrete colourings and its own natural oils which may leave residues behind on a light coloured cover. This cannot be avoided and is therefore not admissible as a complaint.
Fixations:	



Nominal size TEAKWOOD

	Size without flounce	Number of rods	Material class 4	Material class 5	Order no.
			Colours 400 – 499	Colours 500 – 699	
	cm				
	∅ 300	8 parts			166 00 300 731
	∅ 350	8 parts			166 00 350 731
	330 × 330	8 parts			166 00 331 731

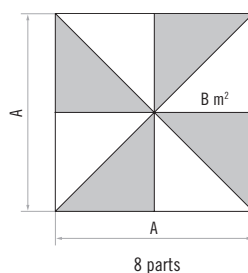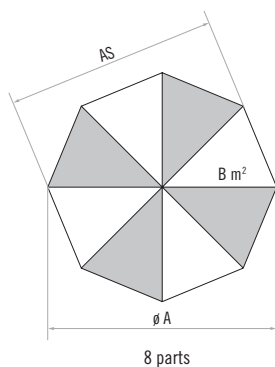

Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height	Foundation	Recommended minimum weight for base	max. wind speed open perm.
cm	cm	cm	m ²	cm	cm	cm	cm	kg	km/h (wind force)
ALEXO®									
A	AS	M	B	E	F	G	C		
without flounce									
Ø 200	190	3.0	2.9	130	210	240	40 × 40	30	20 (4)
Ø 220	210	3.0	3.6	120	205	240	40 × 40	40	20 (4)
Only ALEXO® INDIVIDUAL: with flounces									
Ø 200	190	3.0	2.9	120	195	240	40 × 40	30	20 (4)
Ø 220	210	3.0	3.6	110	190	240	40 × 40	40	20 (4)
PIAZZINO									
A	AS	M	B	E	F	G	C	kg	km/h (wind force)
Ø 300	275	4.8	6.4	95	205	260	60 × 60	40	30 (5)
Ø 350	325	4.8	8.7	80	205	270	60 × 60	55	30 (5)
300 × 300	-	4.8	9.0	50	205	275	60 × 60	55	30 (5)
TEAKWOOD									
A	AS	M	B	E	F	G	C	kg	km/h (wind force)
Ø 300	275	4.8	6.4	135	220	285	60 × 60	40	30 (5)
Ø 350	325	4.8	8.7	105	215	285	60 × 60	55	30 (5)
330 × 330	-	4.8	10.9	45	220	285	60 × 60	70	30 (5)


The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).

The measures of the height are determined by the ST ground socket. If one of the offered bases is used, these measures change only slightly except for the 30 kg concrete base. This latter causes them to go up by 6.5 cm.

The height dimensions are based on the ground socket PX. In the base variations these might differ slightly. Apart from the steel base minus 7.5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage.

In the presence of several sunshades, the minimum distance between one sunshade and another and between sunshades and walls shall be 20 cm.

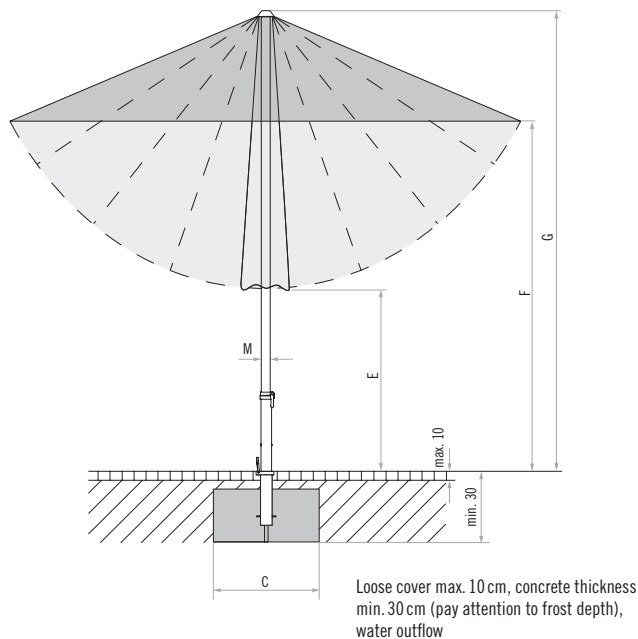

Accessories

Different bases		
•	Concrete base 30 kg, Ø 46 × 8.5 cm, incl. support tube Ø 25 – 33 mm, galvanised steel	350 01 109 566
•	Concrete base with carrying handles, 40 kg, Ø 59 × 7.5 cm, and support tube Ø 25 – 33 mm, galvanised steel	350 01 109 551
Fixing option ST (support tube ST required)		
•	Ground socket ST, galvanised steel	350 01 205 105
•	Support tube ST, Ø 25 – 33 mm, galvanised steel	350 01 205 100
Fixing option Z (support tube Z required)		
•	Concrete base Z, 40 kg, Ø 60 × 7 cm	350 01 109 529
•	Concrete base Z, 55 kg, Ø 60 × 9.5 cm	350 01 109 528
•	Concrete base Z, 70 kg, Ø 75 × 7 cm	350 01 109 527
•	Granite base Z 40 kg, Ø 53 × 7 cm, natural stone	350 01 109 460
•	***Granite base Z 55kg, 55 × 55 × 9 cm, natural stone, with castors and retractable handle	350 01 109 440
•	Steel base Z 40 kg, 58.5 × 58.5 × 2 cm, galvanised steel	350 01 100 210
•	Add-on weight 30 kg, 57.5 × 57.5 × 1.7 cm, galvanised steel	350 01 100 310
•	Wall bracket Z, 180 mm, galvanised steel	350 01 205 000
•	Support tube Z, Ø 48 / 55 mm, galvanised steel	350 01 201 210
•	Support tube Z, Ø 48 / 55 mm, high-grade steel 1.4301 / 304	350 01 201 300
Different fixing options		
•	Lawn spike Ø 25 – 33 mm, galvanised steel	350 01 205 301
Fixing option PX (support tube PX required)		
•	Ground socket PX, galvanised steel	350 01 207 001
•	Ground socket PX, high-grade steel 1.4301 / 304	350 01 207 011
•	Support tube PX, Ø 48 / 55 mm, galvanised steel	350 01 206 001
•	Support tube PX, Ø 48 / 55 mm, high-grade steel 1.4301 / 304	350 01 206 011
Protective cover, coated polyester fabric		
•	Protective cover	350 01 609 985
•	Protective cover with zip and rod	350 01 609 968
•	Protective cover with zip and rod	350 01 609 969
Miscellaneous items		
•	Rechargeable battery light Osyrion 8 for pole Ø 48 – 68 mm, battery charger with european plug (type C) included, (1 accumulator included)	350 01 557 960
•	Rechargeable battery light Osyrion 6 for pole Ø 30 – 50 mm, battery charger with european plug (type C) included, (1 accumulator included)	350 01 557 950
•	Rechargeable battery light Osyrion 4 for pole Ø 30 – 50 mm, battery charger with european plug (type C) included, (1 accumulator included)	350 01 557 910
•	Spare accu, 3.7 V, 4800 mAh (for Osyrion 8)	350 01 557 970

***only suitable for smooth, joint free surface coverings

Your nearest Glatz representative:

